

The Stormceptor[®] System

Performance Claim

The Stormceptor[®] System is capable of removing the following pollutants from stormwater runoff when designed in accordance with the Expert Sizing System Version 2.0:

- TSS overall loading removal range from 76% to 94%
- TKN overall loading removal range from 43% to 65%

The TSS claim is based on three overall loading tests performed at three geographically different sites. Site 1 included eight rain events, site 2 had three rain events and site 3 had four rain events. The rain events varied in intensity and duration.


The TKN claim is based on two overall loading tests performed at two geographically different sites. Site 1 included eight rain events and site 3 had four rain events. The rain events varied in intensity and duration.

Simulations produced by the Expert Sizing System version 2.0 are based on runoff that is generated from a stabilized catchment with all areas covered by vegetation, concrete, asphalt, structures and/or other non-erodible surfaces.

Technology Description

The patented Stormceptor[®] System is a stormwater quality treatment device that can be installed in place of a conventional maintenance hole in a storm drainage system.

The Stormceptor[®] is a vertically oriented precast concrete cylindrical chamber that is separated into upper and lower compartments by a fiberglass insert.

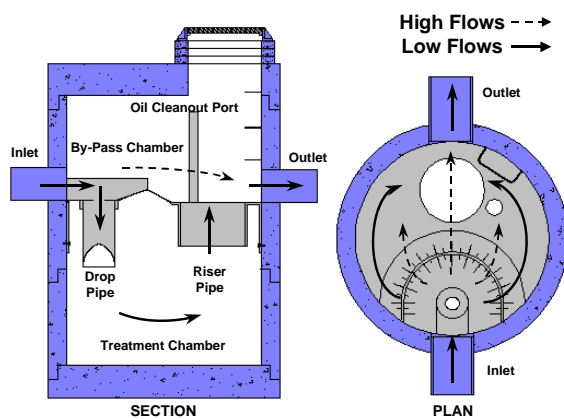

Technology Operation

Stormwater flows into the upper by-pass chamber from the sewer. Inflows less than the design flow rate are diverted by a weir and orifice/drop pipe-assembly through the fiberglass insert into the lower treatment chamber. The drop pipe discharges water parallel to the circular chamber wall to increase detention time and inhibit mixing. From the treatment chamber, water flows up through the riser pipe into the by-pass chamber on the downstream side of the weir and is discharged into the storm sewer.

The water velocity slows when it enters the treatment chamber. Oil or other liquids with a specific gravity less than water will rise and become trapped beneath the fiberglass insert. These pollutants are retained in the treatment chamber because the entrance to the outlet riser pipe is submerged. Sediment will settle to the bottom of the chamber by gravity.

Flows in excess of the orifice/drop pipe capacity will flow over the weir and into the downstream sewer. This action prevents high flows from entering the lower treatment chamber and ensures that captured pollutants are not resuspended.

*Marketed under **Stormceptor**® in North and South America; **Humeceptor**® in Australia, New Zealand and Asia; and **X-ceptor**® in Europe.

Performance Claim Conditions

The conditions for this performance claim are as follows:

St. Paul MN, COMO PARK - SITE 1 0.4 ha									
	3-Aug-98	7-Aug-98	27-Aug-98	19-Sep-98	23-Sep-98	7-Sep-99	11-Sep-99	19-Sep-99	OVERALL
TSS in, kg	5.22	19.47	1.35	1.42	0.72	0.25	14.59	0.13	43.15
TSS out, kg	1.30	3.61	0.40	1.70	0.89	0.21	2.31	0.03	10.45
TSS removed, kg	3.92	15.86	0.95	-0.28	-0.17	0.04	12.28	0.10	32.70
removal % mass	75	81	70	-19	-24	16	84	77	76
TKN in, kg	0.188	0.141	0.011	0.153	0.011	0.013	0.486	0.002	1.005
TKN out, kg	0.106	0.055	0.012	0.066	0.011	0.001	0.091	0.001	0.345
TKN removed, kg	0.08	0.09	0.00	0.09	0.00	0.01	0.40	0.00	0.66
removal % mass	44	61	-9	57	0	92	81	50	65

Boston, MA, Westwood - SITE 2 0.3 ha					Seattle, WA, Seatac - SITE 3 0.4 ha				
	5-Aug-97	21-Aug-97	29-Sep-97	OVERALL	13-Mar-99	25-Apr-99	3-May-99	28-Oct-99	OVERALL
TSS in, kg	0.185	0.099	0.120	0.404	1.891	0.699	0.296	7.401	10.287
TSS out, kg	0.002	0.008	0.013	0.023	0.658	0.315	0.093	0.308	1.373
TSS removed, kg	0.183	0.091	0.107	0.381	1.233	0.384	0.203	7.093	8.914
mass removal, %	99	92	89	94	65	55	69	96	87
TKN in, kg	-	-	-	-	0.099	0.024	0.028	0.083	0.234
TKN out, kg	-	-	-	-	0.033	0.024	0.024	0.052	0.133
TKN removed, kg	-	-	-	-	0.066	0.000	0.004	0.031	0.101
removal % mass	-	-	-	-	67	0	14	37	43

The performance claim is based on the above data from three field studies conducted at three geographically different locations, comprising fourteen storm events of varying intensity (1 to 131 mm/hr, 1 to 24 hrs duration).



Verification

Testing was done by the following: Service Environmental & Engineering (St. Paul, MN site); Environmental Sampling Technology (Boston, MA site); Associated Earth Sciences Inc. (Seattle, WA site). The evaluation was conducted by Pollutech Group of Companies Inc. following the ETV Program's General Verification Protocol (March 2000).

What is the ETV Program?

The Environmental Technology Verification (ETV) Program is a joint Environment Canada - Industry Canada initiative delivered by ETV Canada. The ETV Program is designed to support Canada's environment industry by providing credible and independent verification of technology performance claims.

Stormceptor Contact Information:

Stormceptor Group of Companies
Imbrium Systems Inc.
2 St. Clair Ave. West Suite 2100
Toronto, ON M4V 1L5 Canada
Tel: (416) 960-9900 Toll Free (800) 565-4801
Fax: (416) 960-5637
E-Mail: info@imbriumsystems.com
www.stormceptor.com

ETV Canada Contact Information:

ETV Canada
2070 Hadwen Road Unit 201A
Mississauga, Ontario
L5K 2C9 Canada
Tel: (905) 822-4133
Fax: (905) 822-3558
E-mail: etv@etvcanada.ca
www.etvcanada.ca

Limitation of Verification

Environment Canada, ETV Canada, and the Verification Entity provide the verification services solely on the basis of the information supplied by the applicant or vendor and assume no liability thereafter. The responsibility for the information supplied remains solely with the applicant or vendor and the liability for the purchase, installation, operation (whether consequential or otherwise) is not transferred to any other party as a result of the verification.

Printed March 2000

Revised May 2007

Expires March 2009



Government of
Canada

Gouvernement du
Canada