

Verified by the Canadian ETV Program



Greenplus Hydraulic Fluid ES Technology Fact Sheet for Greenland Corporation

Performance Claim

When tested for acute lethality on trout, Greenplus Hydraulic Fluid ES, manufactured by Greenland Corporation, will achieve an LC₅₀ at least as high as 40,000 ppm when the hydraulic fluid is added to water in the test ratio and tested in accordance with Section 5 of Environment Canada’s EPS1/RM/9 July 1990, as amended May 1996.

Technology Description

Greenplus Hydraulic Fluid ES (Figure 1) has been developed by Greenland Corporation to provide high performance hydraulic fluid characteristics (Table 1) while minimizing the risk of damage to the environment, from leaks and spills, as well as the chemical hazard posed to equipment operators and mechanics. The manufacturing process starts with a vegetable-oil base stock and uses only additives that contain no petroleum or mineral oils and no heavy metals.

Figure 1: Greenplus Hydraulic Fluid ES

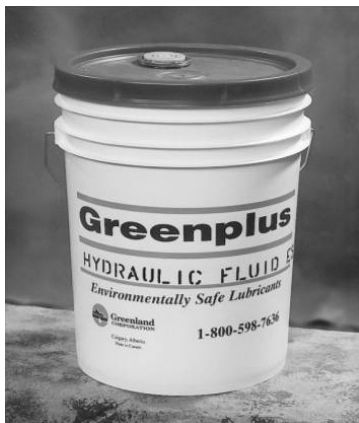


Table 1: Specifications for Greenplus Hydraulic Fluid ES

Grade (ISO)	46
Specific Gravity g/cm ³ @ 15°C	0.91
Kinematic Viscosity:	40°C 42 cSt
	100°C 6.1 cSt
	100°F 210 SUS
	210°F 56 SUS
Viscosity Index	239
Flash Point	279°C/534°F
Pour Point	-36°C/-33°F
pH	7.0-7.2
LC50 (PPM)	> 40,000

Environmental Technology Verification

Technology Application

Greenplus Hydraulic Fluid ES is used in all standard and many specialty hydraulic fluid applications. It is used preferentially by environmentally responsible hydraulic equipment operators working in food processing and in environmentally sensitive locations such as watershed areas, waterways, parks and other recreational areas, as well as in general construction and other specialized applications.

Performance Conditions

Greenplus Hydraulic Fluid ES was tested in accordance with Section 5 of Environment Canada's EPS1/RM/9 July 1990, as amended May 1996. The normal, "static" test method was judged appropriate for testing this hydraulic fluid because it more closely resembles the conditions which would result from a spill of the oil into a waterway.

The normal mixing procedures for this test procedure require only initial thorough stirring, with no further mixing within the 96 hours of the test. During this time any water-soluble elements (toxic or non-toxic) in the test substance would leach out into the water.

Verification

The verification of the performance claim was carried out by J.K. Engineering, Calgary, Alberta using test data generated by Maxxam Analytics, Edmonton, Alberta.

What is the ETV Program?

The Canadian Environmental Technology Verification (ETV) Program is delivered by The Bloom Centre for Sustainability (BLOOM) under a license agreement from Environment Canada. The Canadian ETV Program is designed to support Canada's environment industry by providing credible and independent verification of technology performance claims.

For more information on the Greenplus Hydraulic Fluid ES, please contact:

Greenland Corporation
7016-30 Street South East
Calgary, Alberta
T2C 1N9 Canada
Email: info@greenpluslubes.com
www.greenpluslubes.com

Canadian ETV Program contact information:

BLOOM
2070 Hadwen Road, Suite 101A
Mississauga, Ontario
L5K 2C9 Canada
Tel: (905) 822-4133
Fax: (905) 822-3558
E-mail: melhallak@bloomcentre.com
www.etvcanada.ca



Limitation of Verification

Environment Canada, BLOOM, and the Verification Entity provide the verification services solely on the basis of the information supplied by the applicant or vendor and assume no liability thereafter. The responsibility for the information supplied remains solely with the applicant or vendor and the liability for the purchase, installation, and operation (whether consequential or otherwise) is not transferred to any other party as a result of the verification.